

EFFICIENT RARE EVENT SIMULATION FOR FAILURE PROBLEMS IN RANDOM MEDIA

JINGCHEN LIU, JIANFENG LU, AND XIANG ZHOU

ABSTRACT. In this paper we study rare events associated to solutions of elliptic partial differential equations with spatially varying random coefficients. The random coefficients follow the lognormal distribution, which is determined by a Gaussian process. This model is employed to study the failure problem of elastic materials in random media in which the failure is characterized by that the strain field exceeds a high threshold. We propose an efficient importance sampling scheme to compute small failure probabilities in the high threshold limit. The change of measure in our scheme is parametrized by two density functions. The efficiency of the importance sampling scheme is validated by numerical examples.

1. INTRODUCTION

The study and computation of rare events in stochastic systems have received intensive attention in recent years. Rare events, though do not occur often, represent the most severe consequence of uncertainty and random effects. The study of these rare events hence gives crucial understanding and has important applications. However, due to the small probability of occurrence of such events, the quantification casts a serious challenge for conventional probabilistic methods. For example, a direct Monte Carlo strategy to estimate the vanishing small probability will require a huge number of sample points to give estimates with small relative error; in other words, the huge relative variance of these estimators make them incapable of accurate prediction.

In this work, we aim at developing an efficient important sampling strategy to study rare events associated with materials failure problem. The method we develop in this work applies to the general linear elasticity model for the materials failure problem. For simplicity, we will restrict our discussions here to a scalar model in two dimension, which can be viewed as a model for out-of-plane deformation of an elastic membrane under external forcing. Similar equations also arise from other contexts, such as groundwater hydraulics, electrostatic response of a planar media, etc. Let $D \subset \mathbb{R}^2$ be an open domain with smooth boundary, which is the equilibrium configuration of the membrane. We consider out-of-plane displacement field u given by the following boundary value problem

$$(1) \quad \begin{cases} -\nabla \cdot (a(x)\nabla u(x)) = f(x) & \text{for } x \in D; \\ u(x) = 0 & \text{for } x \in \partial D. \end{cases}$$

Here f is the body force acting on the material and $a : D \rightarrow \mathbb{R}$ gives the stiffness of the material. We assume that the membrane is attached to a frame at the boundary ∂D and hence the Dirichlet

Date: April 17, 2014.

boundary condition in (1). We assume that the external force f is bounded, that is, there exist a constant $C \in \mathbb{R}$ such that

$$(2) \quad |f(x)| \leq C, \quad x \in D.$$

We study the behavior of the material under the influence of internal randomness, which may be a result of material processing or the uncertainty of the material properties at the microscopic level. We adopt a probabilistic viewpoint of the complexity and heterogeneity inherent in the material; and hence view the stiffness coefficient $a(x)$ as a positive random field. To be more specific, we assume that $a(x)$ is a lognormal random field, that is,

$$(3) \quad a(x) = \exp(-\xi(x)), \quad x \in D,$$

where ξ is a stationary Gaussian random field. The lognormal assumption is often used in failure modeling, as it yields good fittings to data (see for example [25]). It is also quite natural from the mathematical point of view, as the equation is then almost surely uniformly elliptic. To simplify notation and without loss of generality, we assume that $\mathbb{E}\xi(x) = 0$ and $\text{Var}\xi(x) = 1$.

The random field viewpoint is taken in the homogenization theory for random heterogeneous and composite materials (see e.g. [22, 30]). However, for the study of rare material failure events, standard homogenization theory is not enough to capture rare events, despite the recent advances in the understanding of variance scaling and central limit theorem [3, 12, 13, 24]. Here our focus is on developing efficient numerical methods for the computation of the material failure probability via importance sampling.

We consider materials failure such that under the external force, the strain of the elastic deformation exceeds a prefixed level at some point. More precisely, let $b \gg 1$ be the given threshold, the failure probability is defined as

$$(4) \quad P\left\{\sup_{x \in D} |\nabla u| \geq b\right\}.$$

Note that this probability is very small when b is large. Direct Monte Carlo simulation is hence difficult to compute such probabilities and achieve small relative error. Instead, we employ importance sampling techniques for the computation of the failure probability.

In this paper, we propose an efficient Monte Carlo method via importance sampling to compute the small failure probabilities as in (4) when the differential equation is driven by a Gaussian random field as in (3). The change of measure proposed in this paper is not of the exponential tilting form and therefore is nonstandard. In the one-dimensional setting, the algorithm can be proved to be asymptotically efficient. For the case in higher dimensions, due to the lack of large deviations results, efficiency cannot be rigorously established. However, the algorithm does admit a very good performance in our numerical studies.

It is a long history of studies of material failure and structure safety in the civil engineering and material sciences from the probabilistic viewpoint or the extreme value theory. The important role of Weibull distribution [31] for (idealized) weak-link principle is well established and applied in numerous engineer applications, although it faces lots of challenges from real material properties. A substantial progress toward this challenge is the well-known work of Bažant on the statistical size effect [4]. In contrast to these engineering statistical models for material/structure failure

problem, we take the mechanistic approach to use the classical linear elasticity model, i.e., (1). It is admitted that many physical processes such as the development of fractures and cracks as well as dynamical failure scenarios are not shown in this model. Yet, it is a good prototype model, in the balance of tractability and complexity of modeling material failure problem. Nevertheless, the probabilistic study of this model for high excursion of strain field is helpful to shed light on the extreme mechanical behaviours of random elastic media. Furthermore, our model is quite general and is never limited to the application of elastic mechanics. There are lots of other important physical and engineer problems modeled in the exactly same form of our elliptic equation (1) with random coefficients. For instance, the Darcy equation with uncertain coefficients is the canonical model for groundwater study and in this context, the derivative of the solution ∇u is an important physical quantity related to the phase speed of pollutants carried by groundwater.

In view of extremely small failure probabilities concerned here, our work fits into the general scope of works that devote to rare event simulations. Different approaches have been proposed in recent year for such problems, in particular in engineering and industrial applications. For instance, the idea of design point shift has been used in the framework of polynomial chaos expansion for failure events [27]. The numerical adaptive strategy is also tested on the PDE with random input data [26]. In terms of Monte Carlo importance sampling method which is free of “curse of dimensionality”, the work [14] combines the cross-entropy method and the surrogate model to efficiently calculate the failure probabilities, which in principle works for very general problems. The recent work [28] applied the large deviation and importance sampling method to the calculation of the failure probability of hypersonic engines. We also mention the study of rare events in optical pulses modeled by randomly perturbed one dimensional non-linear Schrödinger equation (see e.g. [9, 23]). We refer to [2, 8, 10, 11] for general techniques of importance sampling and rare events simulations.

Our problem is also closely connected to the probabilistic theories for Gaussian random field. For stochastic systems driven by light-tailed random variables (such as, Gaussian random variables), it is customary to consider exponential change of measure for the design of efficient importance sampling algorithm. The parameters are usually selected by the minimal cross-entropy method [29] or some control problems related to large deviation principle [10]. For heavy-tailed stochastic systems, some recent works are [5–7]. In the context of Gaussian processes and random fields, the most well studied events are the high level excursions (tail events of the supremum) [1]; the tail events of other convex functionals of Gaussian random fields are also of interest [15–18]. The method in this paper is in part built on the results in this literature.

The rest of the paper is organized as follows. The description of the algorithm is given in Section 2. Implementation details and numerical results are discussed in Section 3. Conclusions and discussions are summarized in Section 4.

2. THE MAIN METHOD

2.1. Rare event simulation, variance reduction, and importance sampling. Let us consider the problem of estimating a small probability $w = P(B) \ll 1$ or a family of probabilities $w(b) = P(B_b)$, where b is the rarity parameter that indicates the difficulty of the problem. In our case, we identify the rarity parameter as the threshold, and the event is given by $B_b = \{\sup_D |\nabla u| \geq b\}$. As b tends to infinity, the probability of interest $w(b) = P(B_b)$ tends to 0.

As the probabilities to be estimated are very small, the computational error needs to be quantified relative to the probabilities of interest. Let us consider an unbiased Monte Carlo estimator Z_b for $w(b)$ such that $\mathbb{E}Z_b = w(b)$. The relative error is given by $\text{Var}(Z_b)/w^2(b)$ or $\mathbb{E}(Z_b^2)/w^2(b) = 1 + \text{Var}(Z_b)/w^2(b)$. Suppose that n independent and identically distributed replicates of Z_b are generated, denoted by $Z_b^{(1)}, \dots, Z_b^{(n)}$. Let

$$\bar{Z}_n \triangleq \frac{1}{n} \sum_{i=1}^n Z_b^{(i)}$$

be the averaged estimator, whose variance is

$$\text{Var}(\bar{Z}_n) = \frac{\text{Var}(Z_b)}{n}.$$

Via Chebyshev's inequality, we obtain that

$$P(|\bar{Z}_n - w(b)| > \varepsilon w(b)) \leq \frac{\text{Var}(Z_b)}{n\varepsilon^2 w^2(b)}.$$

For any $\delta > 0$ if we intend to estimate $w(b)$ with at most ε relative error with at least probability $1 - \delta$, then it suffices to generate

$$n = \frac{\text{Var}(Z_b)}{w^2(b)} \delta^{-1} \varepsilon^{-2}$$

samples. Hence, the necessary sample size is proportional to the relative error $\text{Var}(Z_b)/w^2(b)$.

Consider the direct Monte Carlo estimator I_{B_b} . Its relative error is

$$\frac{\text{Var}(I_{B_b})}{w^2(b)} = \frac{1 - w(b)}{w(b)} \rightarrow \infty$$

as $w(b) \rightarrow 0$. The necessary sample size is $n = w^{-1}(b)\delta^{-1}\varepsilon^{-2}$ and I_{B_b} is considered an inefficient estimator for $w(b)$ when it is very small. There are several efficiency criteria in the literature [2, 8]. The most widely used is the *weak efficiency* or *asymptotic efficiency* requiring that for all $\epsilon > 0$, $\mathbb{E}(I_{B_b}^2)/w^2(b) = o(w^{-\epsilon}(b))$ as $w(b) \rightarrow 0$. In the numerical analysis, we will investigate the relative errors of the proposed estimator. The empirical study shows that our estimator admits reasonably small relative errors (less than 10) when $w(b)$ is very small (less than 10^{-6}), although rigorous efficiency is difficult to establish and is beyond the scope of this paper.

In the subsequent analysis, we employ importance sampling as the main variance reduction technique that is based on the following identity

$$P(B) = \int I(\omega \in B)P(d\omega) = \int I(\omega \in B)\frac{dP}{dQ}Q(d\omega), \quad \text{for all measurable set } B.$$

for a measure Q such that $Q(\cdot \cap B)$ is absolutely continuous with respect to the measure $P(\cdot \cap B)$. As a consequence, we have

$$Z(\omega) = I(\omega \in B)\frac{dP}{dQ}(\omega)$$

is an unbiased estimator of $P(B)$ under Q , in other words, $\mathbb{E}^Q Z = P(B)$, where we use \mathbb{E}^Q for the expectation with respect to the measure Q ,

It is easy to verify that if we choose $\mathcal{Q} = P(\cdot|B) = P(\cdot \cap B)/P(B)$ then the corresponding importance sampling estimator admits zero variance. Thus, we often call \mathcal{Q} the zero-variance change of measure. On the other hand, \mathcal{Q} is clearly of no practical value, in that the likelihood

ratio is almost surely $P(B)$ that is precisely the quantity we want to compute. Nevertheless, the measure \mathcal{Q} provides a guideline to construct a change of measure for the efficient computation of $P(B)$. We need to construct a measure Q that is close to \mathcal{Q} such that we are capable of sampling from Q and computing the Radon-Nikodym dQ/dP .

2.2. The change of measure. Let us characterize a measure Q for the random field ξ as in (3) defined on the continuous sample path space $\mathcal{C}(D)$, where $\xi : D \rightarrow \mathbb{R}$ is a realization of the random field and D is the domain of the PDE. Our choice of Q depends on two probability density functions $h(\cdot)$ and $g_x(\cdot)$ to be determined later. Given h and g , the Radon-Nikodym derivative of Q with respect to P is given by

$$(5) \quad \frac{dQ}{dP}(\xi) = \int_D h(x) \frac{g_x(\xi(x))}{\phi_x(\xi(x))} dx$$

Here, for each point $x \in D$, $\phi_x(\cdot)$ is the marginal density function of $\xi(x)$ under P , that is,

$$\int_A \phi_x(y) dy = P(\xi(x) \in A) \quad \text{for any measurable set } A \subset \mathbb{R}.$$

In (5), $h(\cdot)$ is a density function over the domain D and $g_x(\cdot)$ for each $x \in D$ is a density function on \mathbb{R} . We will choose h and g_x such that the corresponding measure Q is a good approximation of \mathcal{Q} for variance reduction.

Let us first explain how to sample from Q before discussing the choices of h and g_x . It consists of three steps:

Algorithm 1.

- (1) Sample a random index (position) $x \in D$ following the density $h(x)$;
- (2) Conditional on the realized x , sample a random number $\xi(x)$ following the density $g_x(\cdot)$;
- (3) Conditional on the realized x and $\xi(x)$, sample ξ on $D \setminus \{x\}$ from the conditional distribution $P\{\xi \in \cdot \mid \xi(x)\}$.

It is easy to verify that the above three-step procedure is consistent with the Radon-Nikodym derivative (5). If $g_x = \phi_x$ for all $x \in D$, then we have $Q = P$. Thus, the distributions of ξ under P and Q are different only at one random location that is labeled by x sampled from the density h . This suggests if the occurrence of the rare event $\{\sup_{x \in D} |\nabla u(x)| > b\}$ is mostly due to the abnormal behavior of the random field ξ at one location, our Q would be a good candidate of approximating the zero-variance change of measure \mathcal{Q} . In this sense, the distribution of the random index x (*i.e.* $h(x)$) should be approximately the distribution of the location where ξ deviates mostly from its original law under P . Furthermore, the distribution g_x characterizes how $\xi(x)$ deviates from its original law ϕ_x . In what follows, we will describe in details the choices of g_x and h .

2.3. The excursion level and the choice of g_x . Bearing in mind the above intuition, we proceed to describing h and g_x . Among these two, g_x is more important as it quantifies the deviation of ξ from its original law. The basic idea is as follows. If $\sup_D |\nabla u(x)|$ admits an excursion over some high level b , then the process $\sup_D \xi(x)$ must also have a high excursion over some level l_x depending on b and the precise location x where the excursion occurs. This observation is due to the connection between ξ and u in the PDE (1). Therefore, we expect that, under the distribution

g_x , $\xi(x)$ attains a high level l_x that goes to infinity at some rate with b . Once the level l_x has been decided, we would choose the distribution $g_x(\cdot)$ be a Gaussian distribution with mean l_x .

In the analysis of the one-dimensional equation, explicit formula is available for the solution to the differential equation,

$$u'(x) = e^{\xi(x)} \left\{ -F(x) + \frac{\int_D F(x) e^{\xi(y)} dy}{\int_D e^{\xi(y)} dy} \right\}$$

where $F(x) = \int_0^x f(y) dy$. Notice that $F(x)$ is a bounded function and thus $\log u'(x) = \xi(x) + \mathcal{O}(1)$. Hence $\max |u'(x)| > b$ implies $\max |\xi(x)| > \log b + \mathcal{O}(1)$. Based on this closed form solution, it is reasonable to consider that l_x is approximately $\log b$. The optimal choice of l_x would be of order $\log b + \mathcal{O}(\log \log b)$. In the high-dimensional analysis, the PDE does not have a closed form solution. It is generally difficult to derive an analytic relationship between b and l_x . Nevertheless, we conjecture that the relationship $l_x \approx \log b$ is generally appropriate. This would be justified in our numerical examples.

Based on the above discussion, we choose l_x such that it is just enough for $\sup_D |\nabla u(x)|$ to exceed b . In particular, for each $x_0 \in D$ and l , we define

$$\xi_{l,x_0}(x) = l \times C(x - x_0) = E\{\xi(x) \mid \xi(x_0) = l\}$$

where $C(\cdot)$ is the covariance function of ξ that is

$$C(x) = \text{Cov}(\xi(y), \xi(y+x)).$$

The fact $l \times C(x - x_0) = E\{\xi(x) \mid \xi(x_0) = l\}$ is due to that $\xi(x)$ has zero mean and unit variance. For other cases, the form of conditional expectation can be adapted. Let $u_{l,x_0}(x)$ be the solution to the PDE (1) with $a(x) = e^{-\xi_{l,x_0}(x)}$. Then, l_{x_0} is given by

$$(6) \quad l_{x_0} = \min \{l : \max_{x \in D} |\nabla u_{l,x_0}(x)| \geq b\}.$$

We now provide an intuitive explanation for the above choice of l_x . The basic understanding is that the high excursion of $|\nabla u|$ is caused by the high excursion of the input process ξ . In order to determine the necessary excursion level, we perform the following calculations. Conditional on $\xi(x_0) = l_{x_0}$ that is a large number, the conditional field ξ has the following representation

$$\xi(x) = l_{x_0} C(x - x_0) + r(x - x_0)$$

where $r(x)$ is a zero-mean Gaussian process whose covariance function can be obtained by conditional Gaussian calculations. The rationale of (6) is as follows. The process $r(x)$ is the remainder process after taking out the conditional mean and $r(x)$ is of a constant order. If l_{x_0} is selected to be large, then the variation of $r(x)$ is negligible compared to the conditional mean. Therefore, the conditional field can be approximated by

$$\xi(x) \approx l_{x_0} C(x - x_0).$$

By solving (6), l_{x_0} is the minimum level that $\xi(x)$ needs to achieve such that $\sup |\nabla u(x)|$ just exceeds b .

Having l_x defined, we then choose g_x to be the Gaussian distribution

$$(7) \quad g_x \sim \mathcal{N}(l_x, l_x^{-2}).$$

The choice of the variance of g_x comes from the following intuition. The function l_x is interpreted as the necessary level $\xi(x)$ needs to exceed. Notice that $\xi(x)$ is marginally a standard Gaussian random variable. Conditional on $\xi(x) > l_x$, $\xi(x) - l_x$ is asymptotically an exponential random variable with variance l_x^{-2} . Thus, the choice of variance for g_x aims at matching the scale of the overshoot of the standard Gaussian random variable. In the simulation study, we also vary the choices of this variance and found that l_x^{-2} yields the best numerical results in terms of variance reduction. For each $x_0 \in D$, we provide an iterative algorithm to compute l_{x_0} .

Algorithm 2. Initialize $l_{x_0}^{(0)} = \log b$ and $n = 0$

while “not converge” **do**

- $$\left[\begin{array}{l} (1) \text{ Solve the PDE (1) for } \xi(x) = l_{x_0}^{(n)} C(x - x_0) \text{ numerically. Denote the solution by } u^{(n)}. \\ (2) \text{ Set } l_{x_0}^{(n+1)} = l_{x_0}^{(n)} - \log \sup |\nabla u^{(n)}| + \log b. \end{array} \right.$$

When converged, the above algorithm yields a level $l_{x_0}^{(\infty)}$ satisfying (6). Furthermore, if $\xi(x) = l_{x_0} C(x - x_0)$, then we expect that $\sup_D |\nabla u|$ and l_{x_0} have the following relationship

$$(8) \quad \sup_D |\nabla u| \sim \kappa_{x_0} l_{x_0}^\alpha e^{l_{x_0}}.$$

This relationship is correct for the one-dimensional case, and is conjectured for the high-dimensional case (we will verify this numerically in Section 3). Assuming (8), Algorithm 2 is asymptotically the Newton-Raphson algorithm for the equation

$$\kappa_{x_0} l_{x_0}^\alpha e^{l_{x_0}} = b.$$

Given the initial value $l_{x_0}^{(0)} = \log b$, it can be shown that $|l_{x_0}^{(2)} - l_{x_0}^{(\infty)}| = o(1/\log b)$ which is accurate enough for the construction of an efficient importance sampling. Therefore, in our implementation, we take only very few iterations in Algorithm 2.

2.4. The choice of h . We now proceed to the other tuning parameter, the distribution h . Recall that x localizes the largest deviation from the original distribution. Such a deviation is quantified by the level l_x for each x . For each $x \in D$, we then choose

$$h(x) \propto P \left\{ \xi(x) > l_x \mid \sup_D |\nabla u(x)| > b \right\} \propto P \{ \xi(x) > l_x \}.$$

That is, conditioning on the occurrence of the rare event, the probability that x is in a small neighborhood should be proportional to the probability that $\xi(x)$ exhibits a high excursion. After normalization, we get

$$(9) \quad h(x) = \frac{P(\xi(x) > l_x)}{\int_{y \in D} P(\xi(y) > l_y) dy}.$$

Sampling from h requires the numerical evaluation of l_x which induces some computational overhead. To further reduce the computational complexity, we will evaluate l_x for a finite grid that spreads over the domain D and use an interpolation for the rest of the domain. Details will be presented in the subsequent section.

2.5. Summary. Based on the above description, we generate the process $\xi(x)$ according to Algorithm 1. The tuning distributions g_x and h are given in (7) and (9) where l_x is defined through (6). Finally the importance sampling estimator is

$$Z_b = I(\sup |\nabla u(x)| > b) \left(\int_D h(x) \frac{g_x(\xi(x))}{\phi_x(\xi(x))} dx \right)^{-1}.$$

For the implementation, we discretize the space, the details of which is presented in the following section.

3. NUMERICAL DETAILS AND EXAMPLES

We will present numerical examples for one-dimensional and two-dimension cases. The domain for the one dimensional PDE is $[0, 1]$ and the domain for the two dimensional PDE is $D = [0, 1] \times [0, 1]$. The covariance function of the Gaussian field ξ in both cases is

$$(10) \quad E\{\xi(x)\xi(y)\} = C(x - y) = \exp(-|x - y|^2/R^2),$$

where $|\cdot|$ is the Euclidean distance. The scalar R is known as the correlation length of the random field. The boundary condition is Dirichlet $u|_{\partial D} = 0$ unless it is specified otherwise. Our numerical results consist of a verification of the exponential relationship between $\max \xi(x)$ and $\max |\nabla u(x)|$, visualization of the excursion level l_x , and empirical performance of the importance sampling algorithm in estimating the failure probabilities.

3.1. Implementation of the algorithm. To sample the random field ξ , we first need to discretize the domain D and use the field on the discrete mesh grid as an approximation. Denote a point in \mathbb{R}^2 as $x = (x^1, x^2)$. Choose a discrete mesh $\widehat{D}_N \triangleq \{(x_i^1, x_j^2)\}$ where $0 = x_0^1 < x_1^1 < \dots < x_{n_1}^1 = 1$, $0 = x_0^2 < x_1^2 < \dots < x_{n_2}^2 = 1$ and $n_1 \times n_2 = N$. Then any sample path of the continuous random field $\xi(x)$ is approximated by the N -dimensional random vector $(\xi(x_i^1, x_j^2) : 1 \leq i \leq n_1, 1 \leq j \leq n_2)$. The following is the discrete analogue of Algorithm 1 on the grid.

Algorithm 3.

- (1) Sample a random index $\tau \in \widehat{D}_N$ following the weight $h(\tau)\delta_\tau$ as in (9) where δ_τ is the corresponding Lebesgue measure of the cell associated to τ in the mesh \widehat{D}_N .
- (2) Conditional on the realized τ , sample $\xi(\tau)$ following the density $g_\tau(\cdot) \sim N(l_\tau, l_\tau^{-2})$;
- (3) Conditional on the realized τ and $\xi(\tau)$, sample $\{\xi(x) : x \in \widehat{D}_N\}$ from the conditional distribution $P(\xi \in \cdot | \xi(\tau))$;
- (4) Solve PDE (1) with $a(x) = \exp(-\xi(x))$ and calculate $\sup_{x \in D} |\nabla u(x)|$;
- (5) Output the estimator

$$Z_b = I(\sup_D |\nabla u(x)| > b) \left[\sum_{x \in \widehat{D}_N} h(x)\delta_x \cdot \frac{g_x(\xi(x))}{\phi_x(\xi(x))} \right]^{-1}.$$

We now provide further details on steps (3) and (4) in the above algorithm. Step (3) generates a random vector ξ on \widehat{D}_N given a realization $\xi(\tau)$. Notice that ξ on \widehat{D}_N is a multivariate Gaussian random vector and thus the conditional distribution is still multivariate Gaussian. The conditional mean is $\mathbb{E}\{\xi(x) | \xi(\tau) = y\} = y \times C(x - \tau)$ and the conditional covariance matrix is $\widehat{C}_{N-1, N-1} - \widehat{C}_{N-1, 1} \widehat{C}_{N-1, 1}^T$. Here, \widehat{C}_N is the N by N unconditional covariance matrix, $\widehat{C}_{N-1, 1}$ is column of \widehat{C}_N

corresponding to τ with row corresponding to τ deleted, and $\widehat{C}_{N-1,N-1}$ is the $(N-1) \times (N-1)$ sub-matrix of \widehat{C}_N with row and column corresponding to τ deleted. However, in generating this conditional sample, we do not need to decompose the conditional covariance matrix. A simple procedure $\xi(x) \triangleq \xi'(x) + \widehat{C}(x - \tau)(\xi(\tau) - \xi'(\tau))$ for $k = 1, 2, \dots, N$, for all $x \in \widehat{D}_N$ gives the conditional sample $\{\xi(x) : x \in \widehat{D}_N\}$ with the known (conditional) value of $\xi(\tau)$, where $\{\xi'(x) : x \in \widehat{D}_N\}$ is the N -dim Gaussian vector with covariance matrix \widehat{C}_N . To sample the multivariate Gaussian random vectors $\{\xi'(x) : x \in \widehat{D}_N\}$, we adopt the Cholesky decomposition of the covariance matrix that is computed via the pivoted Cholesky factorization [21] in LAPACK 3.2. Due to stationarity, this decomposition needs to be computed only once.

Once a realization of ξ is generated, the partial differential equation (1) is solved by a standard numerical solver. Many traditional advanced numerical strategies such as adaptive mesh refinement will improve the efficiency and the accuracy of the PDE solver. For the numerical examples in this paper, we use the finite volume method on a uniform mesh in D . It is adequate to demonstrate the performance of the variance reduction with a sufficiently high resolution of the mesh grid.

In summary, our preprocessing includes a Cholesky factorization of the conditional covariance matrix and of solving an inverse problem to obtain the excursion level function l . In the sequel, we present various numerical results related to our rare event calculation of the failure probabilities.

3.2. Verification of exponential relationship. We start from a numerical verification of our conjecture about the maximums of ξ and $|\nabla u|$. Our algorithm as well as the analysis depends on the following scaling relationship between the input field ξ and the strain field ∇u , whenever either of them has a high excursion,

$$(11) \quad \sup_D \xi \sim \sup_D \log |\nabla u|.$$

In the one-dimensional case, the explicit formula of u and ∇u allow a verification of the above relation for any bounded external force. For the problem of higher dimension, as explicit solution is not available, the rigorous justification of (11) is more challenging. Here, we numerically verify this relationship via a stochastic approach and a deterministic approach. In the stochastic approach, one spatial location $x^* \in D$ is selected and a sequence of the excursion levels l are selected. For each l , we generate a random sample path $\xi(x)$ conditioned on $\xi(x^*) = l$. We then calculate the maximum value of the strain $\max |\nabla u|$ corresponding to generated $\xi(x)$ with the homogeneous force $f(x) \equiv 1$. In the left panel of Figure 1, we plot $\log(\max |\nabla u|)$ versus $\max \xi$ for different spatial locations x^* . For the deterministic approach, we observe that for l sufficiently large, the conditional field is approximately $\xi(x) \approx l \times C(x - x^*)$, as discussed in Section 2. Hence, we solve the PDE with simply setting $\xi = l \times C(x - y)$ where C is the covariance function (10). The numerical results are in the right panel of Figure 1.

The numerical results in Figure 1 confirm that $\max \log |\nabla u|$ is asymptotically linearly proportional to $\max \xi$ and thus justifies (11). When the external force f is inhomogeneous, a similar relationship can be established numerically. In addition, on comparing the results for different correlation lengths, we found that smaller correlation length yields lower $\max |\nabla u|$. Thus, for smaller correlation length, to ensure that $\max |\nabla u|$ reaches a level b , larger values of $\max \xi$ are required corresponding to higher excursion level function l_x .

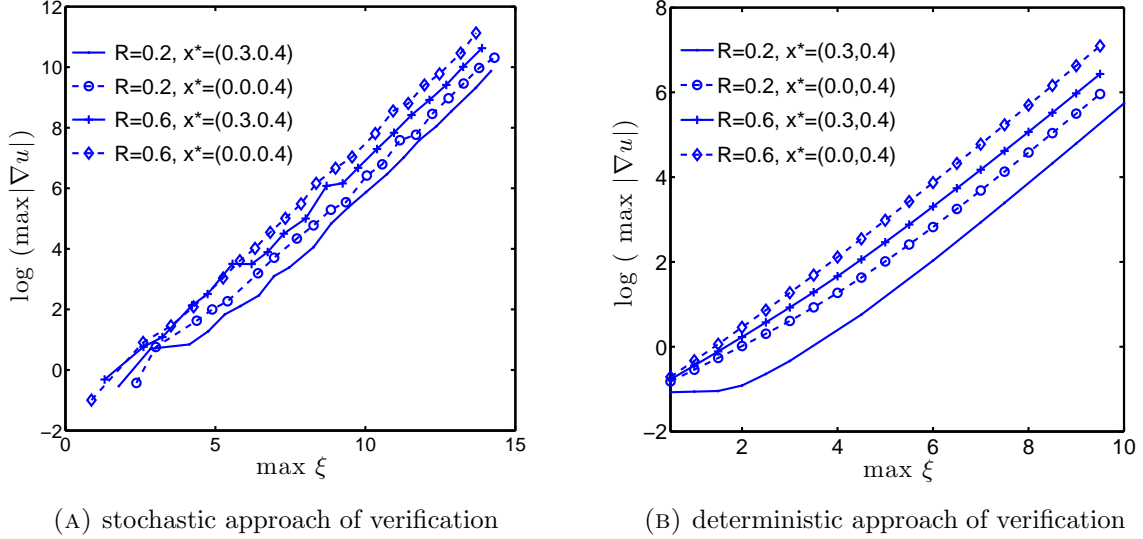


FIGURE 1. Numerical verification of $\max |\nabla u| \sim \exp(\max(\xi))$. The domain is $D = [0, 1]^2$. The left panel is the stochastic approach where for each different value of l , one sample path of $\xi(x)$ is generated conditional on $\xi(x^*) = l$. Due to the randomness, l is not exactly equal to, but very close to, the sampled maximum $\max \xi$. The right panel is the deterministic approach where $\xi(x) = l \times C(x - x^*)$ is deterministic and l is precisely the maximum of ξ .

3.3. Excursion level function l_x . The excursion level function l_x characterizes the spatial distribution of the extreme values of $\xi(x)$ conditional on the failure event. We have explained how to find this function in Section 2.3. The density function h is determined by l_x via (9) and the smaller value of l_x implies a higher likelihood of observing an excursion at or around x .

We now explore the function l_x for different external force functions f . Figure 2 shows the excursion level functions for the one-dimensional problem with $D = [0, 1]$ and f is set to be a constant. Due to the Dirichlet boundary condition, the excursion level function l_x is not a constant and it has significantly lower values close to the boundary, especially when the correlation length R is small. Thus, ξ has a higher probability to exhibit a high excursion near the boundary; so it is for ∇u . The calculation of l_x for the two-dimensional case also confirms this boundary effect. Refer to Figure 3 for the two choices of external force. In Figure 3a, the external force is homogeneous $f(x) \equiv 1$. In Figure 3b, the external force has discontinuity at $x_1 = 0.5$:

$$f(x) = \begin{cases} 1 & \text{if } x_1 \leq 0.5 \\ -1 & \text{if } x_1 > 0.5. \end{cases}$$

The local dip of the excursion level function l_x near this discontinuity is consistent with the physical heuristics that the material is easy to break down at this discontinuity line.

The dependence of the excursion level function on the correlation length R is suggested in Figure 2 from which smaller R requires larger l_x . However, it should be noted that this does not imply that

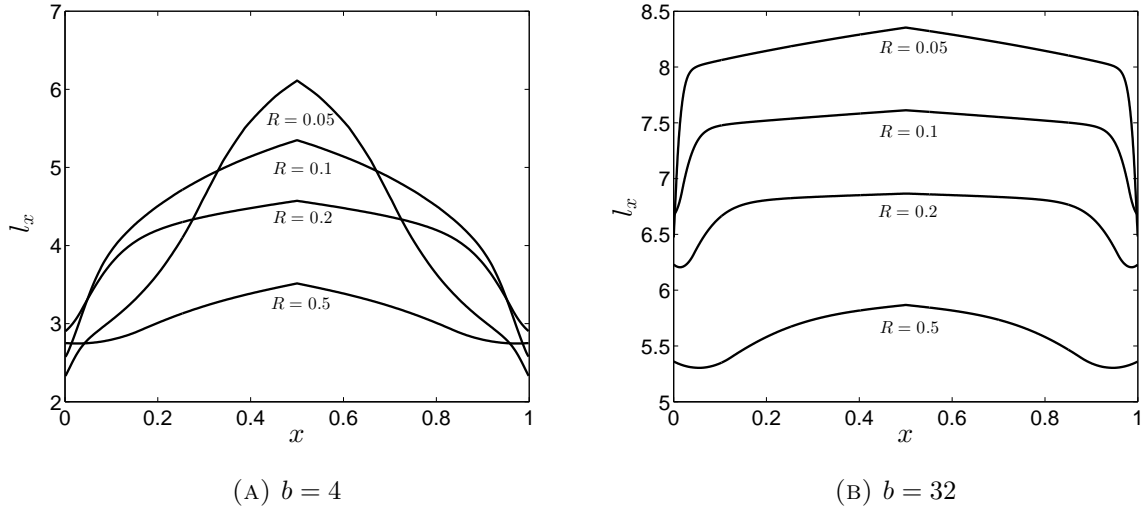


FIGURE 2. The excursion level functions l_x corresponding to $b = 4$ and $b = 32$ for different correlation lengths R . $f \equiv 1$.

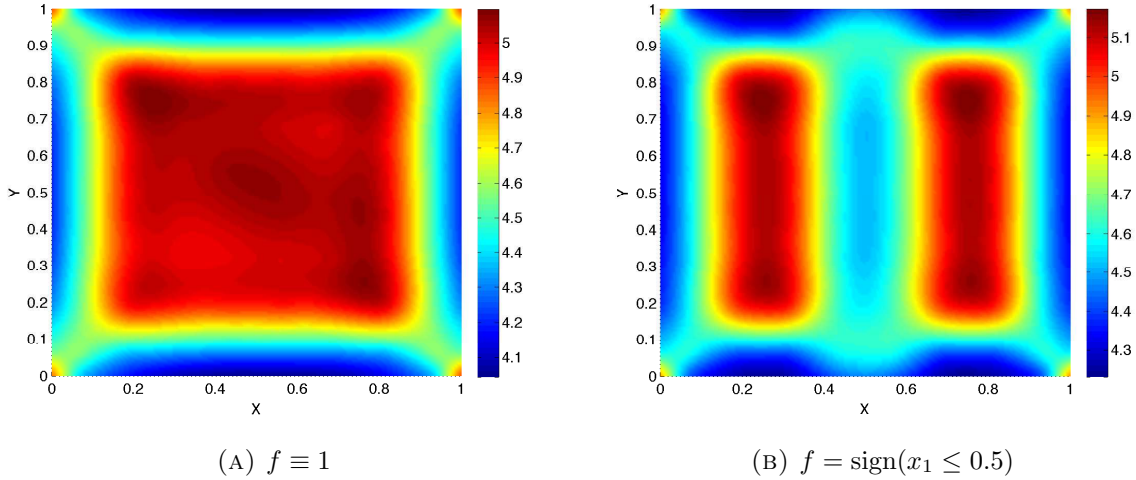


FIGURE 3. Contour plot of the excursion level function l_x for reaching $\max |\nabla u| > b$ with homogeneous external force $f \equiv 1$ (left panel) and the discontinuous external force $f = \text{sign}(x < 0.5)$ (right panel). The correlation length is $R = 0.2$. The threshold is $b = 4$.

a smaller failure probability for smaller R because it is easier for a Gaussian random function with smaller R to generate high excursions.

We check the effectiveness of the obtained excursion level function for the importance sampling scheme by investigating the conditional sample of ξ given that the failure event $\sup |\nabla u| > b$ occurs. Using direct Monte Carlo for a moderate b with f being constant, a few samples were generated given the failure events. We observed a common feature of their spatial profiles from these samples, each of which admits a unique and very high global maximum for each sample of

ξ near the boundary, where the excursion level function l_x has dips. It is worth mentioning that there are several *local* maxima in the domain, but these local maxima are significantly lower than the global one. Most of the strain fields $|\nabla u|$ corresponding to these realizations of ξ show a global maximum close to the global maximizer of ξ .

3.4. On the computation of the failure probabilities. Table 1 summarises the performance of direct Monte Carlo method (MC) and the proposed importance sampling method (IS) described in Algorithm 3 for the failure probabilities for the one-dimensional differential equation. Table 2 shows the results for two-dimensional case with two resolutions of grid mesh, 25×25 and 50×50 . In these tables, “ \hat{p}_b ” columns are the estimated probabilities. The column “std” includes the standard deviation of one sample. The “rel. err.” is the ratio of “std” over “ \hat{p}_b ”. For very large values of b , e.g., $b = 16$ or 32 , due to the finite number of samples, direct Monte Carlo fails to yield reasonable estimates as the failure event has not been observed in the samples. In this case, \hat{p}_b and “std” are marked as “–” and the relative error, “rel. err.”, is calculated by the theoretic result $\sqrt{1/p - 1}$ with p being the estimated \hat{p}_b from the importance sampling method.

b	\hat{p}_b		std		rel. err.	
	MC	IS	MC	IS	MC	IS
2	2.15e-1	2.15e-1	4.12e-1	5.33e-1	1.91	2.48
4	3.06e-2	3.02e-2	1.74e-1	7.78e-2	5.63	2.54
8	2.75e-4	3.47e-4	1.66e-2	8.29e-4	60.4	2.39
16	-	1.08e-5	-	2.90e-5	302*	2.69
32	-	1.89e-7	-	5.61e-7	2300*	2.97

*: relative error is given by $\sqrt{p^{-1} - 1}$ where p is estimated from our proposed method.

TABLE 1. (1D) The estimated failure probabilities $P(\max |\nabla u| > b)$ for the one-dimensional equation where $f \equiv 1$, $R = 0.1$, and $N = 400$ based on 10^6 independent Monte Carlo samples in both direct Monte Carlo and the importance sampling.

The relative error measures the relative efficiency of the Monte Carlo schemes. The comparison of relative errors in the last columns of Table 1 and Table 2 shows that, for all values of the threshold b , the proposed importance sampling scheme substantially outperform direct Monte Carlo. When the event becomes rarer, its advantage becomes more significant. The importance sampling scheme maintains a very mild increment of the relative error that remains to be single digit even when the probability is as small as 10^{-7} . Results based on different mesh sizes in Table 2 shows a relative difference around 10%. This indicates that the spatial resolution is fine enough to get a reasonable accurate numerically obtained efficiency of the estimators.

In Algorithm 3, the alternative distribution $g_\tau(\cdot)$ of the random variable $\xi(\tau)$ is suggested to the Gaussian $\mathcal{N}(l_\tau, \sigma_\tau^2)$ and the variance of this Gaussian is set to be $\sigma_\tau \sim (l_\tau)^{-1}$. To justify this choice of the variance, we compare different constant values of $\sigma_x \equiv \sigma$ and present the effect of σ on the performance of the resulting importance sampling scheme. The comparison is presented in Table 3. The (one-sample) standard deviation of the resulting importance sampling scheme are for different σ values. In addition, the typical values of the reciprocal of the excursion level l_x ($x \in D$) is also

b	\hat{p}_b		std		rel. err.	
	MC	IS	MC	IS	MC	IS
1	2.70e-1	2.69e-1	4.44e-1	2.53e-1	1.65	0.94
2	5.79e-2	5.78e-2	2.34e-1	6.16e-2	4.03	1.07
4	6.25e-3	6.27e-3	7.88e-2	7.53e-3	12.6	1.20
8	3.52e-4	3.57e-4	1.88e-2	5.07e-4	53.3	1.42
16	8.00e-6	1.11e-5	2.83e-3	1.82e-5	353.0	1.64
32	-	1.96e-7	-	3.60e-7	2253*	1.84

(A) mesh size 25×25

b	\hat{p}_b		std		rel. err.	
	MC	IS	MC	IS	MC	IS
1	2.97e-1	2.97e-1	4.57e-1	2.80e-1	1.54	0.94
2	6.71e-2	6.73e-2	2.50e-1	7.26e-2	3.73	1.08
4	7.75e-3	7.72e-3	8.77e-2	9.27e-3	11.3	1.20
8	4.48e-4	4.66e-4	2.12e-2	6.73e-4	47.2	1.44
16	1.80e-5	1.55e-5	4.24e-3	2.56e-5	236.0	1.64
32	-	2.93e-7	-	5.20e-7	1847*	1.78

(B) mesh size 50×50 TABLE 2. (2D) The estimated failure probabilities $P(\max|\nabla u| > b)$ for the two-dimensional equation, where $R = 0.6$ and $f \equiv 1$. Sample size is 10^6 .

calculated for comparison. As can be clearly seen from the results in the table, the optimal choice of σ_τ is indeed around the reciprocal of the excursion level, $\frac{1}{l_x}$.

b	$1/l_x$	$\sigma = 0.02$	$\sigma = 0.1$	$\sigma = 0.2$	$\sigma = 0.3$	$\sigma = 0.5$	$\sigma = 1$	$\sigma = 5$
4	0.24 \sim 0.30	7.40e-1	8.67e-3	9.43e-3	7.36e-3	8.66e-3	1.21e-2	2.81e-2
32	0.16 \sim 0.18	1.65e-6	3.07e-7	2.85e-7	3.22e-7	4.05e-7	5.61e-7	1.40e-6

TABLE 3. The standard deviation of the importance sampling estimator for difference choices of the variance $\sigma_\tau^2 \equiv \sigma^2$ when conditionally sampling $\xi(\tau)$.

For a smaller correlation length $R = 0.2$, we test the algorithm with constant external force f . As the correlation length of the random field is smaller, we use a finer mesh grid (150×150) to resolve. The results obtained are shown in Table 4, which further confirms the efficiency of the importance sampling scheme.

3.5. On the asymptotics of the failure probabilities. The importance sampling method can be applied to efficiently calculate quantities related to the failure event. A direct application is that we can numerically characterize the asymptotic behavior of tail probabilities $p_b = P(\sup_{x \in D} |\nabla u(x)| > b)$. For example, the data in Table 2(B) and Table 4 allow us to postulate an

b	\hat{p}_b		std		rel. err.	
	MC	IS	MC	IS	MC	IS
1	3.58e-1	3.58e-1	4.80e-1	4.60e-1	1.34	1.29
2	3.02e-2	2.96e-2	1.71e-2	1.67e-2	5.67	5.64
4	8.65e-4	8.61e-4	2.94e-2	5.81e-3	34.0	6.75
8	1.20e-5	1.44e-5	3.46e-3	6.28e-5	289	4.36
16	-	1.54e-7	-	6.73e-7	2548*	4.37
32	-	1.06e-9	-	1.29e-8	30715*	12.1

TABLE 4. (2D) $P(\max |\nabla u| > b)$. Correlation length $R = 0.2$. Mesh size 150×150 . Sample size 10^6 . $f \equiv 1$.

empirical asymptotics between $p_b = P(\max |\nabla u| > b)$ and b . Figure 4 shows the log-log plot of p_b vs b and the result of least square fitting. The result shows that the tail distribution satisfies

$$p_b = e^{q(\log b)},$$

where q is a quadratic function and refer to Figure 4 for specific expression and its dependency on the correlation length R . This quadratic dependency is consistent with our analytical result for one dimensional case [19, 20].

In addition, Table 2 and Table 4 together suggest that smaller correlation length leads to larger failure probabilities. This observation is the same with the higher excursion probabilities of Gaussian random fields with smaller correlation length, although the random function $|\nabla u|$ is not trivially Gaussian.

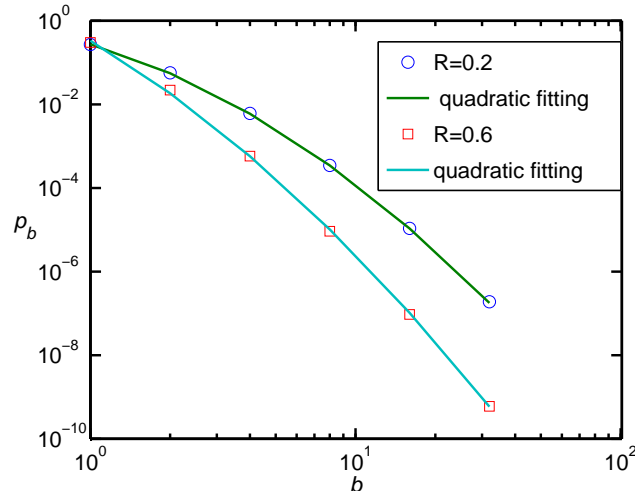


FIGURE 4. log-log plot of p_b vs b from the data in Table 2(B) and Table 4. Set $\log p_b = q(\log b)$ and use the quadratic function for q for least square fitting.

3.6. Numerical results under periodic boundary condition. We have demonstrated the efficiency of the variance reduction on our importance sampling scheme for the Dirichlet boundary

condition and the constant external force. Here, we test our method for the periodic boundary condition and non homogeneous body force. We only study a one-dimensional example where the domain of the elliptic equation is $D = [0, 1]$. To accommodate the periodic boundary condition, we first sample the values of the periodic random field $\xi(x)$ over the finite domain $[0, 1]$. This is done by simply designating a periodic covariance function $C_p(x)$. The function C_p we choose is a period-1 extension of the original covariance function $C(x) = e^{-x^2/R^2}$ where $C_p(x) = C(x)$ for all $x \in [-1/2, 1/2]$. The solvability of the equation requires that $\int_0^1 f(x) = 0$. We consider the following quadratic function $f = 10(x - 1/2)^2 - 5/6$ in our example. The performance of the importance sampling scheme is shown in Table 5. The variance reduction is not as significant as the Dirichlet condition case, but still much better than the direct Monte Carlo for large b .

b	\widehat{p}_b		std		rel. err.	
	MC	IS	MC	IS	MC	IS
1	3.77e-2	3.76e-2	1.90e-1	2.28e-1	5.05	6.06
2	2.76e-3	2.40e-3	5.25e-2	8.80e-2	19.0	36.7
4	9.68e-5	7.17e-5	9.84e-3	3.22e-3	102	45.9
8	1.00e-6	1.51e-6	1.00e-3	1.82e-4	1000	121
12	-	1.28e-7	-	1.77e-5	2795*	138

TABLE 5. (1D) $P(\max|\nabla u| > b)$. Periodic boundary condition. $R = 0.2$. $Nx = 400$. Sample Size 4×10^6 . $f = 10(x - 0.5)^2 - 5/6$.

4. CONCLUSION AND DISCUSSION

We present in this work an efficient importance sampling strategy for computing small probabilities associated with materials failure problem modeled by a scalar elliptic equation with random log-normal coefficient. The change of measure used in the importance sampling is suggested by one dimensional analysis and further justified numerically for higher dimensions. Our numerical results verifies the superior behavior of the estimator over conventional approaches.

The asymptotic analysis of the failure probability, in particular, rigorously establishing the relation (11) is a very interesting open problem.

In this work, for simplicity, we have used the scalar model, however, there is no conceptual difficulty in generalizing our method to linear elastic models, which would be of interest for practical applications.

The efficient sampling technique for the failure event opens the door to many interesting applications. One particularly interesting application would be the design of materials in consideration of minimizing the failure probability. This gives arise to interesting future directions to explore.

ACKNOWLEDGMENTS

J. Liu is supported in part by NSF CMMI-1069064, NSF SES-1323977, and Army Grant W911NF-14-1-0020. The work of J. Lu was supported in part by the Alfred P. Sloan Foundation and the

NSF grant DMS-1312659. X. Zhou acknowledges the financial support from CityU Start-Up Grant (7200301) and Hong Kong Early Career Schemes (109113).

REFERENCES

- [1] R.J. Adler, J.H. Blanchet, and J. Liu, *Efficient Monte Carlo for large excursions of Gaussian random fields*, Ann. Appl. Probab. **22** (2012), no. 3, 1167–1214.
- [2] S. Asmussen and P. Glynn, *Stochastic simulation: Algorithms and analysis*, Springer, New York, 2007.
- [3] G. Bal, *Central limits and homogenization in random media*, Multiscale Model. Simul. **7** (2008), 677–702.
- [4] Z. P. Bažant, *Scaling theory for quasibrittle structural failure*, Proc. Natl. Acad. Sci. USA **101** (2004), no. 37, 13400–13407.
- [5] J. H. Blanchet and J. Liu, *State-dependent importance sampling for regularly varying random walks*, Adv. Appl. Probab. **40** (2008), 1104–1128.
- [6] J. H. Blanchet and J. Liu, *Efficient simulation and conditional functional limit theorems for ruinous heavy-tailed random walks*, Stoch. Proc. Appl. **122** (2012), no. 8, 2994–3031.
- [7] J.H. Blanchet, P. Glynn, and J.C. Liu, *Fluid heuristics, Lyapunov bounds and efficient importance sampling for a heavy-tailed G/G/1 queue*, Queueing Syst. **57** (2007), no. 2-3, 99–113.
- [8] J. Bucklew, *Large deviation techniques in decision, simulation and estimation*, Wiley, New York, 1990.
- [9] Graham M. D. and William L. K., *An iterative stochastic method for simulating large deviations and rare events*, SIAM J. Appl. Math. **71** (2011), no. 3, 903–924.
- [10] P. Dupuis and H. Wang, *Importance sampling, large deviations, and differential games*, Stoch. Stoch. Reports **76** (2004), 481–508.
- [11] W. E and E. Vanden-Eijnden, *Transition path theory and path-finding algorithms for the study of rare events*, Ann. Rev. Phys. Chem. **61** (2010), 391–420.
- [12] A. Gloria and F. Otto, *An optimal variance estimate in stochastic homogenization of discrete elliptic equations*, Ann. Probab. **39** (2011), 779–856.
- [13] A. Gloria and F. Otto, *Quantitative theory in stochastic homogenization*, 2014. preprint.
- [14] J. Li, J. Li, and D. Xiu, *An efficient surrogate-based method for computing rare failure probability*, J. Comput. Phys. **230** (2011), 8683–8697.
- [15] J. Liu, *Tail approximations of integrals of Gaussian random fields*, Ann. Probab. **40** (2012), 1069–1104.
- [16] J. Liu and G. Xu, *Some asymptotic results of Gaussian random fields with varying mean functions and the associated processes*, Ann. Stat. **40** (2012), 262–293.
- [17] J. Liu and G. Xu, *On the conditional distributions and the efficient simulations of exponential integrals of Gaussian random fields*, Ann. Appl. Probab. (to appear).
- [18] J. Liu and G. Xu, *On the density functions of integrals of Gaussian random fields*, Adv. Appl. Probab. (to appear).
- [19] J. Liu and X. Zhou, *On the failure probability for one dimensional random material under delta external force*, Commun. Math. Sci. **11** (2013), no. 2, 499–521.
- [20] J. Liu and X. Zhou, *Extreme analysis of a random ordinary differential equation*, J. Appl. Probab. (to appear).
- [21] C. Lucas, *LAPACK-Style Codes for Level 2 and 3 Pivoted Cholesky Factorizations*, 2004. LAPACK Working Note 161.
- [22] G. Milton, *The theory of composites*, Cambridge University Press, 2002.
- [23] R. O. Moore, G. Biondini, and W. L. Kath, *A method to compute statistics of large, noise-induced perturbations of nonlinear schrödinger solitons*, SIAM Rev. **50** (2008), no. 3, 523–549.
- [24] J. Nolen, *Normal approximation for a random elliptic equation*, Probab. Theory Related Fields (to appear).
- [25] M. Ohring, *Reliability and failure of electronic materials and devices*, Academic Press, 1998.
- [26] Chen P. and A. Quarteroni, *Accurate and efficient evaluation of failure probability for partial different equations with random input data*, Comput. Methods in Appl. Mech. Eng. **267** (2013), 233–260.

- [27] M. Paffrath and U. Wever, *Adapted polynomial chaos expansion for failure detection*, J. Comput. Phys. **226** (2007), no. 1, 263–281.
- [28] G. Papanicolaou, N. Westy, and T.-W. Yang, *Probability of failure in hypersonic engines using large deviations*, 2012. arXiv:1208.5029.
- [29] R.Y. Rubinstein and D.P. Kroese, *The cross-entropy method*, Springer, New York, 2004.
- [30] S. Torquato, *Random heterogeneous materials: Microstructure and macroscopic properties*, Springer, 2001.
- [31] W. Weibull, *A statistical distribution function of wide applicability*, J. Appl. Mech. **18** (1951), 293–297.

DEPARTMENT OF STATISTICS, COLUMBIA UNIVERSITY, NEW YORK, NY

E-mail address: jcliu@stat.columbia.edu

DEPARTMENT OF MATHEMATICS, PHYSICS, AND CHEMISTRY, DUKE UNIVERSITY, BOX 90320, DURHAM, NC
27708 USA

E-mail address: jianfeng@math.duke.edu

DEPARTMENT OF MATHEMATICS, CITY UNIVERSITY OF HONG KONG, HONG KONG SAR

E-mail address: xizhou@cityu.edu.hk